

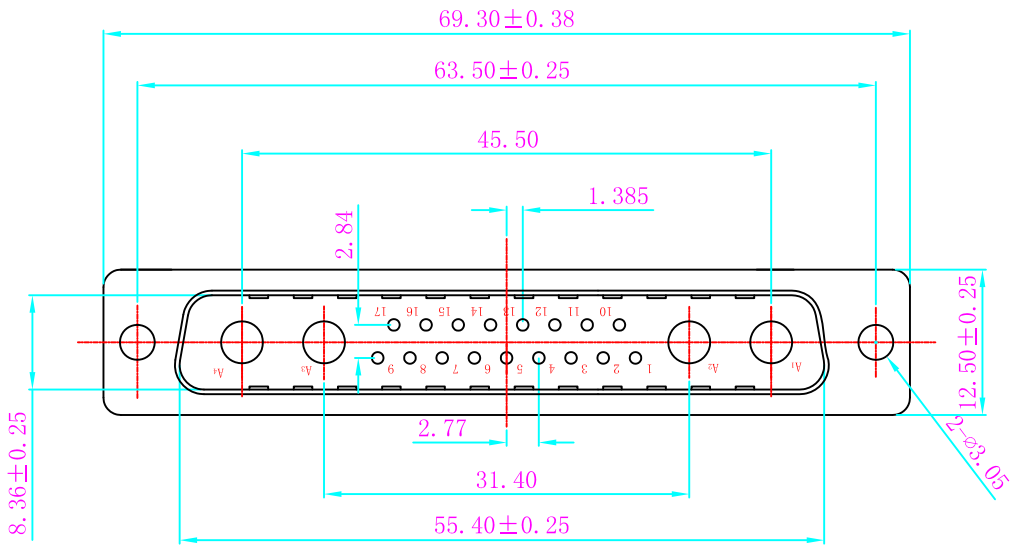
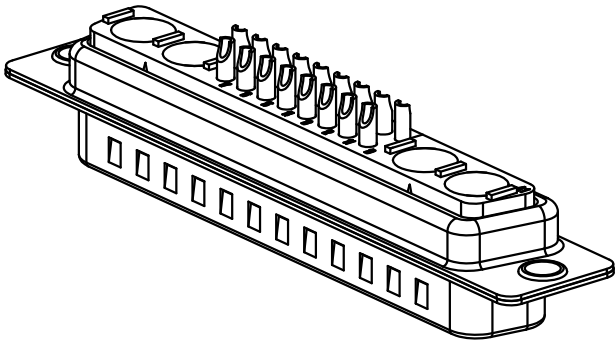


| 变更标记 | 日期 | 变更内容 | 签名 | 核准 |
|------|----|------|----|----|
|      |    |      |    |    |

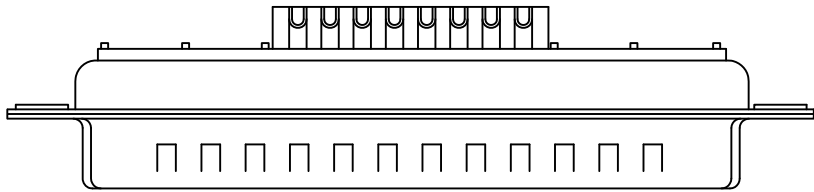

005- 21 1 04 x xx 6 0 01

Plastic color:

- 1=Black
- 2=Blue
- 3=White

Pin electroplating:

- 01= 1u" gold
- 02= 2u" gold
- 03= 3u" gold
- 04= 5u" gold
- 05= 15u" gold

MATERIALS AND FINISH  
SHELL: COPPER  
CONNECTOR INSULATOR: PBT, UL 94V-0  
HIGH POWER CONTACT: COPPER MATERIAL, GOLD PLATED.  
ELECTRICAL CHARACTERISTICS  
THE WORKING VOLTAGE: 300V.  
HIGH POWER CONTACT RESISTANCE: 20mΩ MAX.  
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.  
INSULATION RESISTANCE: 1000MΩ MIN.  
TEMPERATURE RATING: -55°~+125°.

|     |    |     |                           |      |                  |
|-----|----|-----|---------------------------|------|------------------|
| 设计: | 郭威 | 品名: | 21W4公头 焊线式 无大端子 焊线式 光孔 无磁 |      |                  |
| 审核: | 姜伟 | 图号: | LL-005-0132               | 料号:  | 005-21104xxx6001 |
| 核准: | 陈锐 | 日期: | 2024.03.22                | 单位:  | mm               |
|     |    | 比例: | 1:1                       | 未注公差 |                  |
|     |    | 版次: | A/1                       | X.   | ±0.50            |
|     |    |     |                           | X.X  | ±0.38            |
|     |    |     |                           | X.XX | ±0.25            |

Lianlink

东莞联立电子科技有限公司

Dongguan Lianlink electronics technology Co. Ltd