



变更标记	日期	变更内容	签名	核准

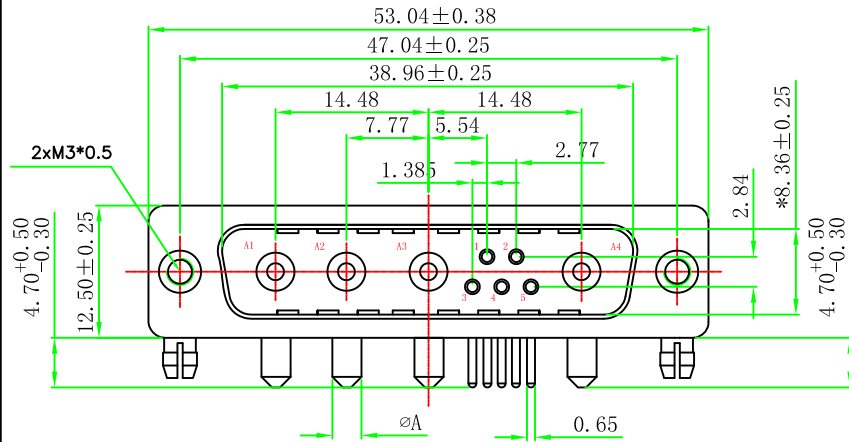

005- 09 1 04 x xx 3 x 22

Plastic color:

1=Black
2=Blue
3=White

Pin electroplating:

01= 1u" gold
02= 2u" gold
03= 3u" gold
04= 5u" gold
05= 15u" gold

CURRENT:

1=10A
2=20A
3=30A
4=40A

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.

CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.

CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.

BRACKET:COPPER ALLOY MATERIAL, Ni PLATED.

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.

CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS.


THE WORKING VOLTAGE:300V.

HIGH POWER CONTECT RESISTANCE:2.7 MILLIOHMS MAX.


DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.

INSULATION RESISTANCE:2000 MEGAOHMS MIN.

TEMPERATURE RATING:-55° ~+125° .

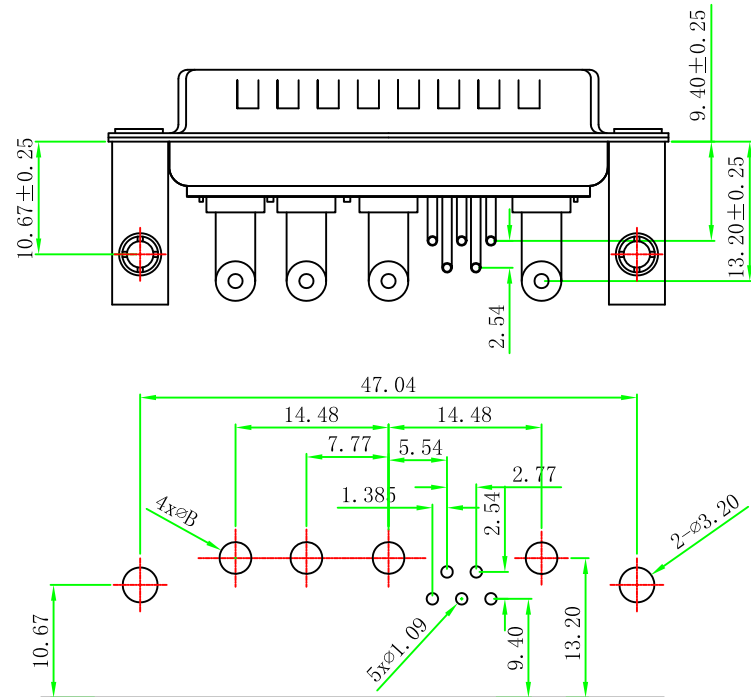

PCB LAYOUT

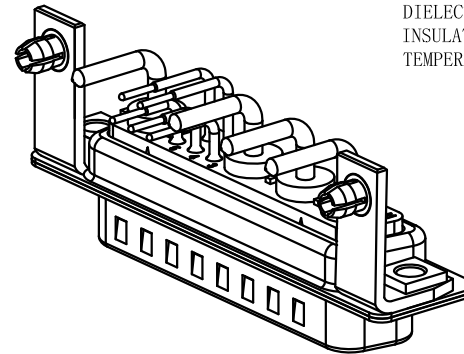

PO(X)	电流强度(A)	øA	PCB øB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

设计:	郭威	品名:	9W4公头 电流弯插式 铆10.8支架M3牙 板孔距2.54	
审核:	姜伟	图号:	LL-005-0092	料号: 005-09104xxx3x22
核准:	陈锐	日期:	2022. 04. 18	单位: mm
		比例:	1:1	未注公差
		版次:	A/0	X. ±0.50
				XX ±0.38
				XX ±0.25

Lianlink

东莞联立电子科技有限公司

Dongguan Lianlink electronics technology Co. Ltd