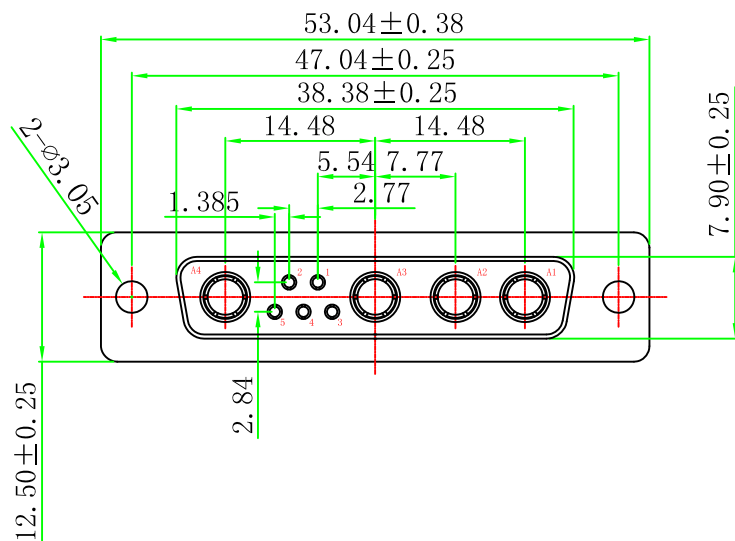


005- 08 2 08 x xx 3 x 01

Plastic color:

1=Black

2=Blue

3=White

Pin electroplating:

01= 1u" gold

02= 2u" gold

03= 3u" gold

04= 5u" gold

05= 15u" gold

CURRENT:

1=10A


2=20A

3=30A

4=40A

变更标记	日期	变更内容	签名	核准

PO (X)	A	B	WIRE	CURRENT RATING (A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

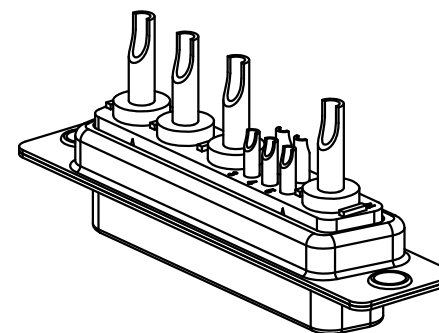

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, Tin/Ni OR Au FINISHED.

CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGHT POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.

CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.

CONNECTOR WITH SIGNAL CONTACT CURRENT RATING : 3.0 AMPS.


THE WORKING VOLTAGE: 300V.

HIGH POWER CONTECT RESISTANCE: 2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.

INSULATION RESISTANCE: 2000 MEGAOHMS MIN.

TEMPERATURE RATING: -55° ~ +125° .

设 计:	郭 威	品 名:	9W4 母头 焊线式 光孔			
审 核:	姜 伟		图 号:	LL-005-0118	料 号:	005-08208xxx3x01
核 准:	陈 锐			日 期:	2022. 04. 18	单 位:
			比 例:		1:1	未 注 公 差
		X.		±0.50		X° ±2°
		版 次:	A/0	XX	±0.38	XX° ±1°
				X.XX	±0.25	

Lianlink

东莞联立电子科技有限公司

Dongguan Lianlink electronics technology Co. Ltd