



变更标记	日期	变更内容	签名	核准

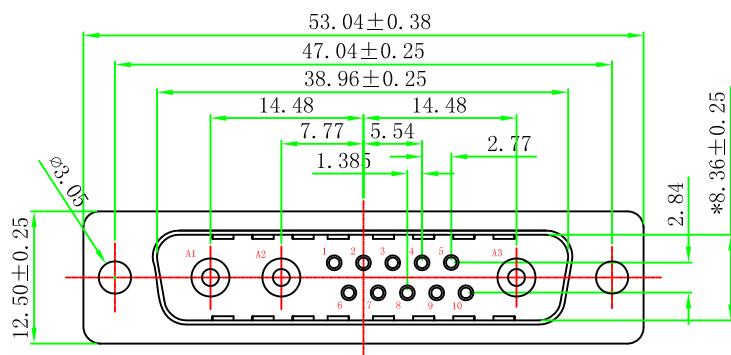

005- 13 1 03 x xx 3 x 01

Plastic color:


1=Black
2=Blue
3=White

Pin electroplating:

01= 1u" gold
02= 2u" gold
03= 3u" gold
04= 5u" gold
05= 15u" gold

CURRENT:

1=10A
2=20A
3=30A
4=40A

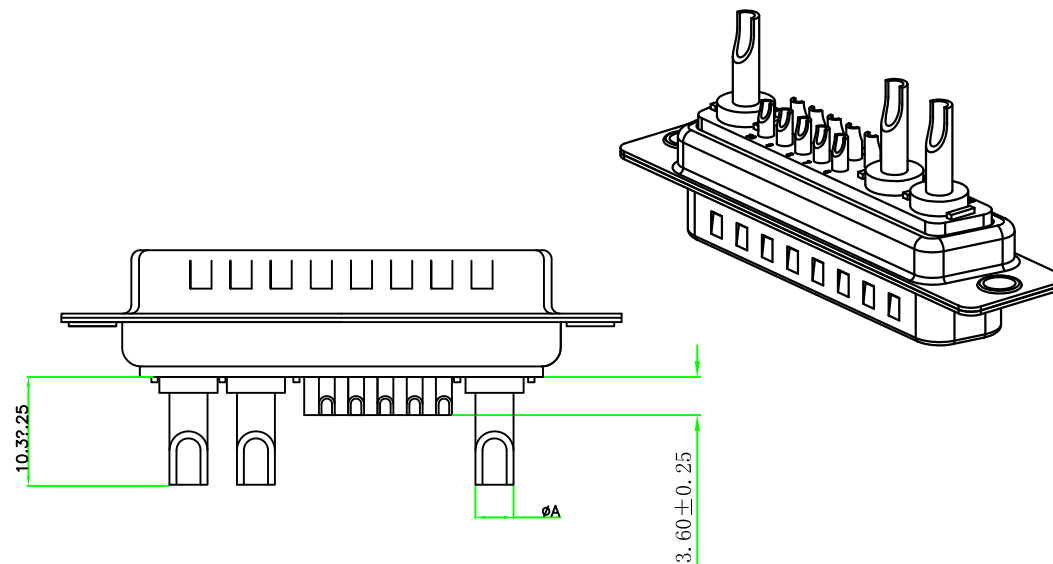

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT :COPPER ALLOY MATERIAL,GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :3.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

PO(X)	A	B	WIRE	CURRENT RATING (A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

设计:	郭威	品名:	13W3公头 焊线式 光孔	
审核:	姜伟	图号:	LL-005-0099	料号: 005-13103xxx3x01
核准:	陈锐	日期:	2022. 04. 18	单位: mm
		比例:	1:1	未注公差
		版次:	A/0	X. ±0.50
				X.X ±0.38
				X.XX ±0.25

Lianlink

东莞联立电子科技有限公司

Dongguan Lianlink electronics technology Co. Ltd