



变更标记	日期	变更内容	签名	核准

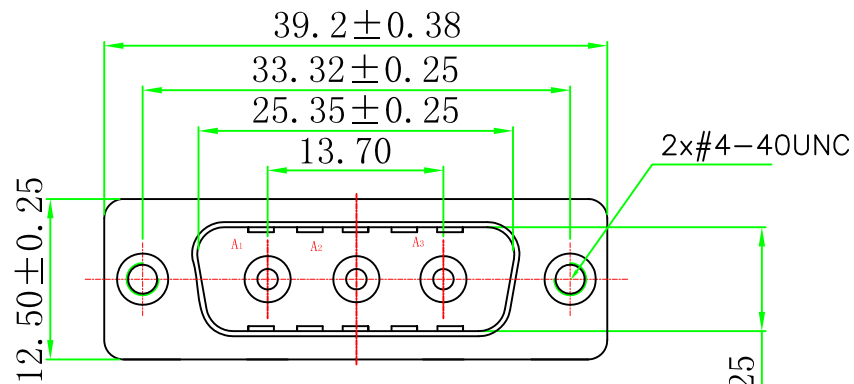

005- 03 1 03 x xx 3 x 09

Plastic color:

1=Black
2=Blue
3=White

Pin electroplating:

01= 1u" gold
02= 2u" gold
03= 3u" gold
04= 5u" gold
05= 15u" gold

CURRENT:

1=10A
2=20A
3=30A
4=40A

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.

CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.

BRACKET/SCREW:COPPER ALLOY MATERIAL, Ni PLATED.

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.




THE WORKING VOLTAGE:300V.

HIGH POWER CONTECT RESISTANCE:10 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.

INSULATION RESISTANCE:2000 MEGAOHMS MIN.

TEMPERATURE RATING:-55° ~+125° .

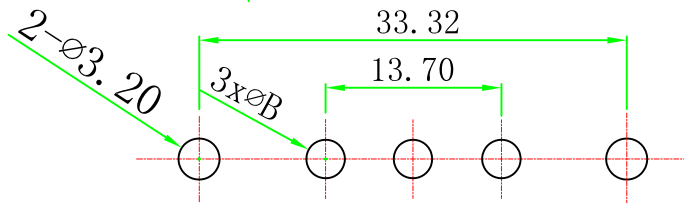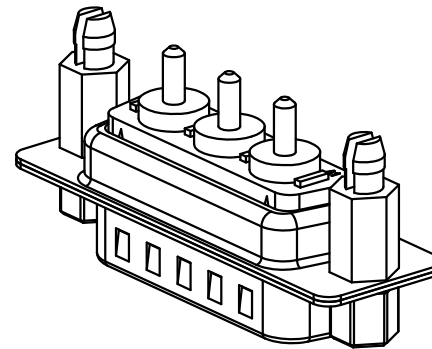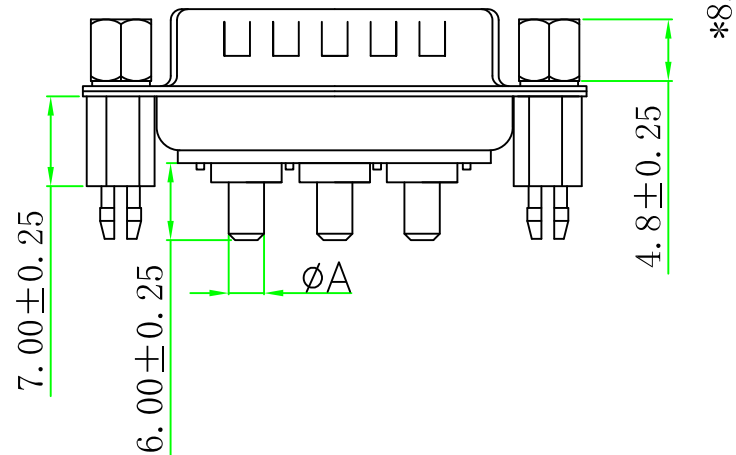

PCB LAYOUT

PO(X)	电流强度(A)	ØA	PCB ØB
1	10	1.7	2.0
2	20	2.75	3.05
3	30	3.3	3.6
4	40	3.8	4.10

设计:	郭威	品名:	3W3公头 电流直插式 铆7.0鱼叉锁4.8螺丝		
审核:	姜伟	图号:	LL-005-0032	料号:	005-03103xxx3x09
核准:	陈锐	日期:	2022. 04. 18	单位:	mm
		比例:	1:1	未注公差	
		版次:	A/0	X.	±0.50
				X.X	±0.38
				X.XX	±0.25
				X°	±2°
				X.X°	±1°

Lianlink

东莞联立电子科技有限公司

Dongguan Lianlink electronics technology Co. Ltd