



变更标记	日期	变更内容	签名	核准

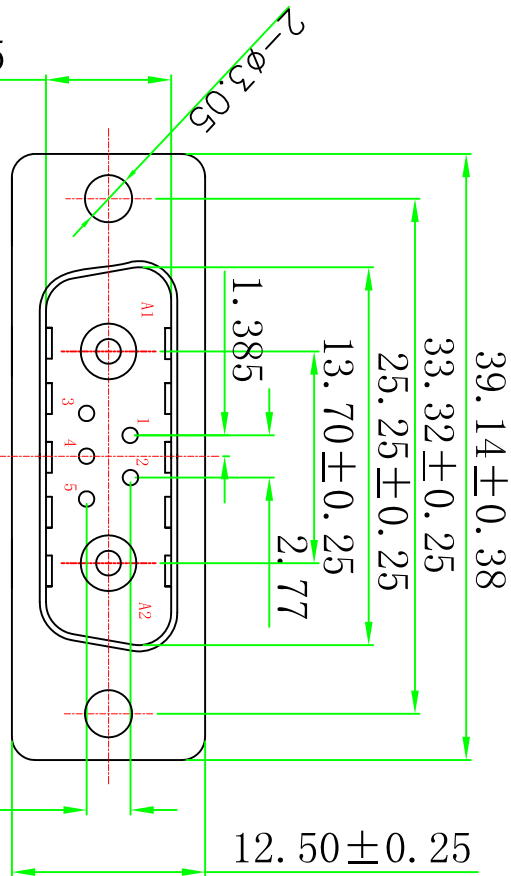


005- 07 1 02 X XX 3 X 02

Plastic color:
1=Black
2=Blue
3=White

Pin electroplating:
01= 1u" gold
02= 2u" gold
03= 3u" gold
04= 5u" gold
05= 15u" gold

CURRENT:
1=10A
2=20A
3=30A
4=40A

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL. Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, OR 30 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ +125° .

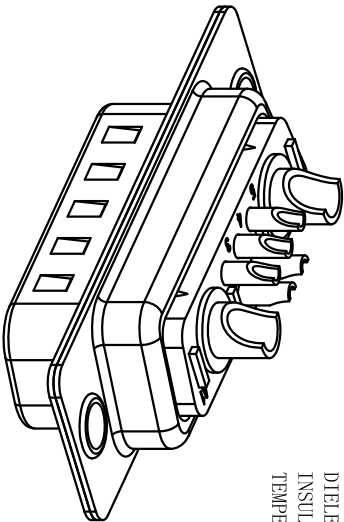

NO (X)	A	WIRE	CURRENT RATING
1	2.5	12#	10A
2	3.6	10#	20A
3	4.4	8#	30A
4	5.5	6#	40A

设计:	郭威	品名:	7W2公头 短体 电流焊线式 光孔		
审核:	姜伟	图号:	LL-005-0044	料号:	005-07102xxx3x02
核准:	陈锐	日期:	2022.04.18	单位:	mm

	比例:	1:1	未注公差		
	版次:	A/0			
			X.	±0.50	X° ±2°
			XX	±0.38	XX° ±1°
			XXX	±0.25	